

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

L9289.01110 PCT

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/762581

INTERNATIONAL APPLICATION NO.  
PCT/JP00/03704INTERNATIONAL FILING DATE  
June 8, 2000PRIORITY DATE CLAIMED  
June 10, 1999

## TITLE OF INVENTION

BASE STATION APPARATUS AND NETWORK IDENTIFIER ASSIGNMENT METHOD

## APPLICANT(S) FOR DO/EO/US

Takashi ARAMAKI and Yoshimasa SHIRASAKI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

## Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

Claim for Priority w/ PCT/IB/304  
PCT/IB/308  
PCT/RO/101

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR <b>09/762581</b> )		INTERNATIONAL APPLICATION NO. <b>PCT/JP00/03704</b>		ATTORNEY'S DOCKET NUMBER <b>L9289.01110 PCT</b>	
--	--	--	--	--	--

21. The following fees are submitted:.


<b>BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :</b> <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1,000.00</b> <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860.00</b> <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b> <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>\$860.00</b>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				<b>\$0.00</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	11 - 20 =	0	x \$18.00	<b>\$0.00</b>	
Independent claims	6 - 3 =	3	x \$80.00	<b>\$240.00</b>	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$1,100.00</b>	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>SUBTOTAL =</b>				<b>\$1,100.00</b>	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				<b>\$0.00</b>	
<b>TOTAL NATIONAL FEE =</b>				<b>\$1,100.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL FEES ENCLOSED =</b>				<b>\$1,100.00</b>	
				<b>Amount to be: refunded</b>	<b>\$</b>
				<b>charged</b>	<b>\$</b>

☒ A check in the amount of **\$1,100.00** to cover the above fees is enclosed.  
☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
 A duplicate copy of this sheet is enclosed.  
☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **19-4375** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

James E. Ledbetter  
 STEVENS, DAVIS, MILLER & MOSHER, LLP  
 1615 L Street, NW, Suite 850  
 Washington, DC 20036  
 Tel: 202/408-5100  
 Fax: 202/408-5200

  
 SIGNATURE  
 James E. Ledbetter  
 NAME  
 28,732  
 REGISTRATION NUMBER  
 February 9, 2001  
 DATE

8/PRTS

09/762581

1

JCO5 Rec'd PCT/PTO 09 FEB 2001

## DESCRIPTION

### BASE STATION APPARATUS AND NETWORK IDENTIFIER ASSIGNMENT METHOD

5

#### Technical Field

The present invention relates to a base station apparatus and network identifier assignment method used in a digital radio communication system.

10

#### Background Art

Identification of a communication network is made in a digital radio communication system including a plurality of base station apparatuses that perform radio communications with at least one communication terminal apparatus. This communication network identification is made, for example, in the following cases:

(1) To check whether a network is connectable or not prior to authentication, etc. after power of a communication terminal is turned on and before starting a communication with a base station (AP) (at the time of so-called association)

(2) To verify operator and services supported, etc. at handover destination

25

Identification of a communication network is made using a network identifier (e.g., network ID, hereinafter abbreviated as "NET-ID"). For this NET-ID, several bits of CCH (Broadcast Control Channel) are used.

A communication network is made identifiable by assigning this NET-ID to each communication network.

In general, 4 bits of BCCH are used as a NET-ID, making 16 types of communication network identifiable.

5 This NET-ID is determined using random numbers when a communication network is set up.

However, in Japan, 4 frequencies are assigned as a 5-GHz band of radio communication. When there are many adjacent private networks in office buildings in a  
10 downtown area or when there is a plurality of public networks of different service types, etc., there can be many communication networks in narrow bands of a specific region.

Considering these situations, it is quite  
15 difficult to identify a communication network using a 4-bit NET-ID. Therefore, when many communication networks coexist, it may be quite difficult to identify communication networks according to the conventional method.

20

#### Disclosure of Invention

It is an object of the present invention to provide a base station apparatus and network identifier assignment method capable of making identification of  
25 communication networks even when many communication networks coexist.

A theme of the present invention is to investigate NET-IDs of adjacent base stations, assign a NET-ID of

the own station based on the investigation result and prevent NET-IDs from colliding with each other even when many communication networks coexist.

## 5 Brief Description of Drawings

FIG.1 is a block diagram showing an outlined configuration of a base station apparatus according to Embodiment 1 of the present invention;

FIG.2 illustrates a frame format used in a radio  
10 communication;

FIG.3 is a drawing to explain a method of assigning NET-IDs to a communication network;

FIG.4 is a drawing to explain a method of assigning NET-IDs to a communication network;

FIG.5 is a drawing to explain a method of assigning  
15 NET-IDs to a communication network;

FIG.6 is a drawing to explain a method of assigning NET-IDs to a communication network;

FIG.7 is a block diagram showing an outlined  
20 configuration of a communication terminal apparatus that carries out a radio communication with a base station apparatus according to Embodiment 2 of the present invention;

FIG.8 is a block diagram showing an outlined  
25 configuration of a base station apparatus according to Embodiment 4 of the present invention; and

FIG.9 is a block diagram showing a configuration of a scrambler in the base station apparatus according

to Embodiment 4 above.

#### Best Mode for Carrying out the Invention

With reference now to the attached drawings,  
5   embodiments of the present invention will be explained  
in detail below.

(Embodiment 1)

FIG.1 is a block diagram showing a configuration  
of a base station apparatus according to Embodiment 1  
10   of the present invention. Here, a base station apparatus  
in a TDMA-based digital radio communication system will  
be explained. Furthermore, suppose the network  
identifier is a 2-bit network ID. Also suppose  
communication networks include in-house LANs and various  
15   radio communication systems, etc.

A signal sent from the other end of communication  
is received by radio reception section 102 via antenna  
101. Radio reception section 102 performs processing  
such as amplification (gain control), down-conversion,  
20   A/D conversion, etc. on the reception signal. After A/D  
conversion, this signal is sent to demodulation section  
103 and demodulated there, and output as reception data.

The demodulated signal is sent to network ID  
assignment section 105. Network ID assignment section  
25   105 assigns a NET-ID of the own station based on a NET  
ID of another base station included in the signal and  
updates network ID table 104. The content of this  
updated network ID table 104 is sent out, and therefore

this content is sent to frame composition section 107.

The transmission data is sent to frame composition section 107, frame-composed there and sent to modulation section 106. Furthermore, after being modulated by modulation section 106, the transmission data is sent to radio transmission section 108. Radio transmission section 108 performs processing such as D/A conversion, up-conversion, amplification (gain control) on the modulated signal. The signal processed in this way is sent via antenna 101 as a transmission signal.

Then, operation of the base station apparatus with such a configuration, that is, the method of assigning NET-ID will be explained. Here, suppose a TDMA communication is performed with a signal in the frame format shown in FIG.2. The frame format shown in FIG.2 is configured by BCCH 201, FCCH (Frame Control CHannel) 202, SBCH (Slow Broadcast control CHannel) 203, DL (Down Link) 204, UL (Up Link) 205 and RA (Random Access channel) 206.

When a new communication network is set up, the NET-ID assignment method investigates NET-IDs of adjacent base stations, then decides an appropriate NET-ID based on the investigation result. At this time, the decided NET-ID is updated in the NET-ID table stored in the base station.

More specifically, when a new communication network is set up, the newly-set base station issues a communication request to the existing base station.

This request is made by frame composition section 107 sending an investigation instruction signal via RA 206. This investigation instruction signal is automatically or manually sent when power is turned on when a new base station is set up.

The existing base station that receives the signal sent via this RA 206, that is, the base station having a service area overlapping with the newly-set base station broadcasts a base station number via BCCH 201.

10 This newly-set base station receives a signal including this base station number, demodulates the signal by demodulation section 103 and recognizes the base station number.

Then, for the recognized base station number, the newly-set base station sends to frame composition section 107 frame assignment information instructing that a TDMA-based time slot to be assigned and frame composition section 107 composes this frame assignment information into FCCH 202 and sends the frame-composed signal to the existing base station.

Then, the existing base station notifies the content of the NET-ID table of the own station via BCCH 201. The newly-set base station receives this signal and sends the signal to network ID assignment section 105.

25 Network ID assignment section 105 decides a NET-ID based on the content of the received NET-ID table so that no collision occurs between NET-IDs and updates the received NET-ID and decided NET-ID in network ID table



104.

The updated content of the network ID table is sent to the existing base station and the existing base station updates the received content of the network ID  
5 table in the network ID table of the own station.

Thus, NET-IDs can be assigned in such a way as not to collide with NET-IDs of other communication networks.

Here, it is also possible to manually investigate NET-IDs beforehand and assign an unused NET-ID based on  
10 the information. In this case, since an unused NET-ID is manually investigated, there is no need to provide a special mechanism to investigate NET-IDs, making it possible to simplify the apparatus.

Furthermore, it is also possible to manually assign  
15 (set) NET-IDs based on the investigation result of NET-IDs. In this case, there is no need to provide a special mechanism to set NET-IDs, making it possible to simplify the apparatus. In this case, it is also possible to automatically assign (set) NET-IDs, that is,  
20 for the base station to independently assign (set) NET-IDs or manually assign NET-IDs beforehand.

Furthermore, NET-IDs can also be investigated periodically for a certain period of time. This allows a NET-ID table to be updated periodically and allows  
25 unused NET-IDs to be assigned more effectively without any collision. There is no restriction on the investigation period.

Furthermore, NET-IDs, which the newly-set base

station acquires from the existing base station, can be acquired from a wired communication network or from a wireless communication network. For example, in the case where at least two base stations share a communication network and these base stations are connected over a wired communication network, it is possible for the existing base station to directly send NET-IDs to the newly-set base station through a wired communication.

10       Next, the network identifier assignment method above will be explained with a specific example:

(1) Company A installs a communication network for an in-house LAN (see FIG.3).

15       First, AP#1-1 is installed and set to NET-ID=1. At this time, since this system is not used around, it is possible to set an arbitrary value without limitation.

Next, AP#1-2 is installed and assigned a NET-ID. At this time, since AP#1-2 constructs a communication network in the same system, the same NET-ID (NET-ID=1) as that of AP#1-1 is used as the NET-ID. At this time, AP#1-2 acquires NET-ID=1 from AP#1-1 through a wired or wireless communication using the method above.

(2) Company B installs a communication network for an in-house LAN (see FIG.4).

25       In (1), company B further installs AP#2-1 and sets NET-ID=2. At this time, AP#2-1 receives BCCH data from AP#1-1 and identifies the base station number and then requests AP#1-1 to send the content of the NET-ID table.

In response to the request from AP#2-1, AP#1-1 sends the content of the NET-ID table of the own station to AP#2-1.

From this, AP#2-1 can recognize from the content of the received NET-ID table that NET-IDs other than  
 5 NET-ID=1 are unused. Then, AP#2-1 sets a NET-ID other than NET-ID=1 as the NET-ID of the own station, for example, NET-ID=2 and at the same time updates the NET-ID of the own station set in the NET-ID table of the own station.

10 Furthermore, AP#2-1 sends the content of the updated NET-ID table to AP#1-1. AP#1-1 updates the content of the received NET-ID table in the NET-ID table of the own station and sends the content of the updated NET-ID table to AP#2-1 through a wired or wireless  
 15 communication. AP#2-1 updates the content of the received NET-ID table in the NET-ID table of the own station.

(3) Company C installs a communication network for an in-house LAN (see FIG.5).

20 In (2), company C installs AP#3-1 and sets NET-ID=3. At this time, AP#3-1 receives BCCH data from AP#2-1 and identifies the base station number and then requests AP#2-1 to send the content of the NET-ID table. In response to the request from AP#3-1, AP#2-1 sends the  
 25 content of the NET-ID table of the own station to AP#3-1.

From this, AP#3-1 can recognize from the content of the received NET-ID table that NET-IDs other than NET-ID=1,2 are unused. Then, AP#3-1 sets a NET-ID other

than NET-ID=1,2 as the NET-ID of the own station, for example, NET-ID=3 and at the same time updates the NET-ID of the own station set in the NET-ID table of the own station.

5           Furthermore, AP#3-1 sends the content of the updated NET-ID table to AP#2-1. AP#2-1 updates the content of the received NET-ID table in the NET-ID table of the own station and sends the content of the updated NET-ID table to AP#1-1 as BCCH data.

10           AP#1-1 updates the content of the received NET-ID table in the NET-ID table of the own station and sends the content of the updated NET-ID table to AP#1-2 through a wired or wireless communication. AP#1-2 updates the content of the received NET-ID table in the NET-ID table  
15 of the own station.

(Embodiment 2)

This embodiment explains a case where the content of a NET-ID table is notified via a communication terminal such as a mobile station. For example, suppose  
20 a situation in which it is impossible to receive BCCH between base stations. In such a situation, there is a danger that a same NET-ID may be used. Thus, in the case where a communication terminal exists between both base stations, NET-IDs are assigned using this communication  
25 terminal.

The configuration of the base station apparatus according to Embodiment 2 of the present invention is the same as that of Embodiment 1 (FIG.1). FIG.7 is a

block diagram showing a configuration of a communication terminal apparatus that performs a radio communication with the base station apparatus according to this embodiment.

5           A signal sent from the other end of communication is received by radio reception section 702 via antenna 701. Radio reception section 702 performs processing such as amplification (gain control), down-conversion, A/D conversion, etc. on the reception signal. After A/D  
10 conversion, this signal is sent to demodulation section 703 and demodulated, and output as reception data.

          After being modulated by modulation section 704, the transmission data is sent to frame composition section 705, frame-composed there and sent to radio  
15 transmission section 706. Radio transmission section 706 performs processing such as D/A conversion, up-conversion, amplification (gain control) on the spread/modulated signal. The signal processed in this way is sent via antenna 701 as a transmission signal.

20           Then, operation of the base station apparatus with such a configuration, that is, the method of assigning NET-ID will be explained. Here, suppose a case where a newly-set base station and existing base station cannot receive BCCH, a communication terminal exists between  
25 both base stations and the communication terminal is sending a signal including the content of the NET-ID table to the base station at the other end of communication all the time or periodically.

Once a new communication network is set up, the newly-set base station can receive a signal including the content of the NET-ID table being transmitted/received between the communication terminal and existing base station. That is, the newly-set base station identifies the base station number, recognizes the BCCH time slot of the existing base station and receives the signal including the content of the NET-ID table through the same operation as that of Embodiment 1.

The newly-set base station extracts the content of the NET-ID table of the existing base station from the reception signal and sends the content to network ID assignment section 105. Network ID assignment section 105 decides a NET-ID based on the content of the received NET-ID table so that no collision occurs between NET-IDs and updates the received NET-ID and decided NET-ID in network ID table 104.

The updated content of the network ID table is sent to the existing base station via the communication terminal as shown above and the existing base station updates the received content of the network ID in the network ID table of the own station. The content of the NET-ID table updated by this newly-set base station is acquired by the existing base station from a signal sent all the time or periodically by another communication terminal that communicates with the newly-set base station and updated in the NET-ID table of the own station

through the above-described procedure.

In this embodiment, when a new communication network is set up, it is also possible for the newly-set base station to request the existing base station to  
5 notify the content of the NET-ID table of the own station via the communication terminal that is communicating with the newly-set base station. At this time, upon reception of the request for the notification of the content, the communication terminal sends a network ID  
10 investigation instruction signal to frame composition section 705 and frame composition section 705 incorporates the network ID investigation instruction signal in the frame to be sent to the existing base station.

15 The communication terminal sends the signal including this network ID investigation instruction signal to the existing base station. The existing base station notifies the content of the NET-ID table of the own station to the communication terminal according to  
20 the network ID investigation instruction signal included in the reception signal.

The communication terminal sends the content of the NET-ID table of the existing base station to frame composition section 705 and frame composition section  
25 705 incorporates the content of the NET-ID table of the existing base station in the frame to be sent to the newly-set base station. Then, the communication terminal sends the signal incorporating the content of

the NET-ID table to the newly-set base station.

The newly-set base station extracts the content of the NET-ID table of the existing base station from the reception signal and sends the content to network ID assignment section 105. Network ID assignment section 105 decides a NET-ID based on the content of the received NET-ID table so that no collision occurs between NET-IDs and updates the received NET-ID and decided NET-ID in network ID table 104.

The updated content of the network ID table is sent to the existing base station via the communication terminal as shown above and the existing base station updates the content of the received network ID table in the network ID table of the own station.

In this way, this embodiment can also assign NET-IDs in such a way as not to collide with NET-IDs of other communication networks. Furthermore, this embodiment can efficiently assign NET-IDs even in the case where base stations have service areas overlapping with each other but it is impossible to receive BCCH between the base stations.

(Embodiment 3)

This embodiment explains a case where extension codes are used when communication networks exceeding in number the number of NET-ID bits coexist.

In BCCH, there is a restriction on the number of bits assigned to a NET-ID (for example, 4 bits or less), and therefore SBCH is used when communication networks



exceeding in number the number of bits assigned to the NET-ID in BCCH are set.

This SBCH is a channel used to investigate whether a target network is already contracted or a service to be used is supported or not, and is a broadcast channel, which is not transmitted for every frame but transmitted in a long cycle.

When this SBCH is used, it is necessary to use a specific NET-ID as an extension identifier. For example, suppose NET-ID=0 is an extension identifier.

In the case where the result of an investigation of an existing NET-ID before the installation of the base station shows that there is no unused NET-ID value, that is, the number of bits assigned to the NET-ID is 2, and all NET-ID=1 to 3 are used, information that the NET-ID is an extension identifier with the field of the NET-ID value regarded as "0" is broadcast.

Then, in the case where all NET-ID=1 to 3 are used, the NET-ID of the base station to be newly set is broadcast using SBCH. Therefore, in the case where the content of the NET-ID table is acquired and the extension identifier is all that is left, the extension identifier becomes a sign indicating that "the NET-ID will be broadcast by SBCH". This makes it possible to increase the number of NET-ID bits, and as a result, increase the number of installable communication networks. According to the method above, NET-IDs are investigated and set in the same way as for Embodiments 1 and 2 except that a different

channel is used.

In this embodiment, it is also possible to distinguish a communication network using a NET-ID on BCCH from a communication network using a NET-ID on SBCH.

5 For example, BCCH is used to broadcast only NET-IDs of a private communication network and SBCH is used to broadcast NET-IDs of a public communication network.

This makes it possible to simplify operation of devices used only for a private communication network.

10 This means great merits in terms of cost and hardware scale. As a result, this embodiment is applicable to home appliances.

Furthermore, BCCH is used to broadcast only NET-IDs of a public communication network and SBCH is used to  
15 broadcast NET-IDs of a private communication network.

This makes it possible to fully secure the number of public communication networks that allow high-speed handover. For example, if a NET-ID has 4 bits, up to 15 types of public communication network with high-speed  
20 handover capability are acceptable. This number is considered enough when roaming among public communication network operators is taken into account.

In the case where communication networks exceeding in number the number of bits assigned to BCCH exist, this  
25 embodiment monitors NET-IDs used in adjacent communication networks even after the base station is set up. Then, in the case where the result of NET-ID monitoring shows that an extension identifier (for

example, NET-ID=0) is used, actual NET-IDs are broadcast using extension identifiers via SBCH even in a communication network that has been using a NET-ID other than the extension identifier (for example, any one of  
 5 NET-ID=1 to 3) so far.

That is, in the case where the number of already installed networks exceeds the number of bits assigned to BCCH, all communication networks broadcast NET-IDs using an extension identifier via SBCH.

10 A communication network (established earlier) that continues to use NET-ID=1 to 3 broadcasting via BCCH provides faster handover than a communication network (established later) broadcasting via long-cycle SBCH and this is not fair. As described above, it is possible to  
 15 maintain fairness by all communication networks broadcasting NET-IDs using extension identifiers via SBCH.

Next, the network identifier assignment method above will be explained with a specific example.

20 Company D installs a network for an in-house LAN (see FIG.6).

In the case (3) explained in Embodiment 1, if company D installs AP#4-1 and sets a NET-ID, AP#4-1 receives BCCH data from AP#3-1 and identifies the base  
 25 station number and then requests AP#3-1 to send the content of the NET-ID table. In response to the request from AP#4-1, AP#3-1 sends the content of the NET-ID table of the own station to AP#4-1.

From this, AP#4-1 can recognize from the content of the received NET-ID table that all NET-ID=1 to 3 are used and only NET-ID=0 is unused. Then, AP#4-1 sets an extension identifier NET-ID=0 as the NET-ID of the own station, and at the same time sets the identifier of the own company as an NOP-ID (Network Operator ID) in SBCH for communication network identification. Moreover, AP#4-1 updates the NET-ID of the own station set in the NET-ID table of the own station.

Furthermore, AP#4-1 sends the content of the updated NET-ID table to AP#3-1. AP#3-1 updates the content of the received NET-ID table in the NET-ID table of the own station. As a result of updating it is found that the NET-ID extension identifier is used, and therefore AP#3-1 sets NET-ID=0 (extension identifier) in the NET-ID table of the own station. Furthermore, AP#3-1 sets the identifier of the own company as an NOP-ID (Network Operator ID) in SBCH. AP#3-1 sends the content of the updated NET-ID table to AP#2-1.

AP#2-1 updates the content of the received NET-ID table in the NET-ID table of the own station. As a result of updating it is found that the NET-ID extension identifier is used, and therefore AP#2-1 sets NET-ID=0 (extension identifier) in the NET-ID table of the own station. Furthermore, AP#2-1 sets the identifier of the own company as an NOP-ID (Network Operator ID) in SBCH. AP#2-1 sends the content of the updated NET-ID table to AP#1-1.

AP#1-1 updates the content of the received NET-ID table in the NET-ID table of the own station. As a result of updating it is found that the NET-ID extension identifier is used, and therefore AP#1-1 sets NET-ID=0 (extension identifier) in the NET-ID table of the own station. Furthermore, AP#1-1 sets the identifier of the own company as an NOP-ID (Network Operator ID) in SBCH. AP#1-1 sends the content of the updated NET-ID table to AP#1-2 through a wired or wireless communication.

AP#1-2 updates the content of the received NET-ID table in the NET-ID table of the own station. As a result of updating it is found that the NET-ID extension identifier is used, and therefore AP#1-2 sets NET-ID=0 (extension identifier) in the NET-ID table of the own station. Furthermore, AP#1-2 sets the identifier of the own company as an NOP-ID (Network Operator ID) in SBCH. (Embodiment 4)

This embodiment explains a case where by providing NET-IDs with an offset value, it is possible to more effectively prevent collision between NET-IDs and thereby support more communication networks. This allows the number of installable communication networks to be increased.

FIG.8 is a block diagram showing an outlined configuration of a base station apparatus according to embodiment 4 of the present invention. The same components as those in FIG.1 will be assigned the same reference numerals and detailed explanations thereof

will be omitted.

This base station apparatus is equipped with  
scrambler 801 that scrambles BCCH and descrambler 802  
that descrambles scrambled BCCH. As shown in FIG.9,  
5 scrambler 801 is configured by initial value setter 901  
having adder 9011 that adds an offset value to a frame  
counter value and shift register 902 having delayer 9021  
and adders 9022 and 9023. Descrambler 802 also has a  
configuration similar to that of the scrambler shown in  
10 FIG.9.

This scrambler 801 uses a frame counter value  
(initial 4 bits of BCCH in FIG.9) +  $\alpha$  as the initial value.  
Therefore, when a frame counter value is input to adder  
9011 of initial value setter 901 in the scrambler shown  
15 in FIG.9, offset value  $\alpha$  is added and output to shift  
register 902 (7 bits in FIG.9).

With the presence of adder 9022, a bit string is  
randomized in this shift register 902. Thus, scrambling  
is performed by adding this randomized bit string to the  
20 frame counter value through adder 9023. In this way,  
predetermined bits (NET-ID bits) of BCCH are scrambled.  
Descrambling by descrambler 802 is also performed  
through an operation similar to that described above.

In this embodiment, MOD (frame counter value +  $\alpha$ )  
25 can be used as a scrambler initial value. For example,  
in the case of 4 bits, MOD16 ( $\alpha = 0$  to 15) is used. In  
this case, since there are 16 kinds of  $\alpha$  and 16 kinds  
of NET-ID values, it is possible to identify

communication networks of up to 256 types. Since  $\alpha$  is assumed to have the same number of bits as that of the frame counter value in particular, there is no need to add special hardware for scrambling.

5        Furthermore, it is possible to extend the number of installable communication networks to 257 or more by setting (frame counter +  $\beta$ :  $\beta$  is an arbitrary numerical value equal to or greater than 16) as the initial value.

10        In this embodiment, it is also possible to enhance confidentiality of the system by changing the frame counter value, which becomes the initial value of the scrambler, from one frame to another. For example, scrambling processing is performed by changing a change pattern for every communication network and randomly  
15        selecting the frame counter value. More specifically, the frame counter value is incremented for every frame such as "1"→"2"→"3" in communication network 1, while the frame counter value is decremented for every frame such as "1"→"7"→"6" in communication network 2 and the  
20        frame counter value is incremented for every frame such as "1"→"3"→"5" in communication network 3.

25        Furthermore, the scrambler shown in FIG.9 performs scrambling processing based on a polynomial of fixed length (sextic polynomial). It is possible to identify more communication networks by changing the degree of this polynomial from one system to another.

      Considering a way to facilitate roaming and handover between different public service operators, it

is desirable that the degree of a polynomial used for scrambling be identical among communication networks. Thus, a possible way is to change the degree of a polynomial between a private system and public system.

5 For example, a sextic polynomial is used for a private system and a septic polynomial is used for a public system. In this way, it is possible to appropriately increase the number of identifiable communication networks for every system.

10           Embodiments 1 to 4 above describe the case where NET-IDs are used as network identifiers, but the present invention is also applicable to cases where any identifier is used as far as the identifier can identify a communication network. The embodiments above also  
15 describe the case where BCCH and SBCH are used as channels to broadcast NET-IDs, but the present invention can also use any channel as far as the channel can broadcast NET-IDs.

          Embodiments 1 to 4 above describe the case where  
20 a NET-ID has 2 bits, but the present invention places no restrictions on the number of NET-ID bits. Furthermore, Embodiments 1 to 4 above describe the case where an extension code is set as NET-ID=0, but it is also possible to set the extension code for other  
25 NET-IDs.

          Furthermore, Embodiments 1 to 4 above describe the case with a digital radio communication system according to a TDMA system, but the present invention is also



applicable to other communication systems, for example, an OFDM system or CDMA system.

The present invention is not limited to Embodiments 1 to 4 above, but can be modified in various ways. For example, Embodiments 1 to 4 above can also be combined with each other as appropriate.

The base station apparatus of the present invention adopts a configuration including an investigating section that investigates network identifiers of existing base stations having overlapping communication network service areas and a network identifier assigning section that assigns an unused network identifier as the network identifier of the own station based on the result of the investigation above.

This configuration makes it possible to assign a network identifier so that the network identifier does not collide with network identifiers of other communication networks even when multiple communication networks coexist.

The base station apparatus of the present invention adopts a configuration including an investigating section that investigates network identifiers of existing base stations having overlapping communication network service areas, a setter that sets an extension identifier when the result of the investigation above shows that there is no unused network identifier and extends the number of bits assigned to the network identifier and a network identifier assigning section

that assigns an unused network identifier as the network identifier of the own station.

This configuration makes it possible to assign a network identifier so that the network identifier does  
5 not collide with network identifiers of other communication networks even when multiple communication networks coexist. This configuration also makes it possible to extend the number of installable communication networks.

10 The base station apparatus of the present invention in the above configuration adopts a configuration including a table that correlates communication networks with network identifiers.

The base station apparatus of the present invention  
15 adopts a configuration with the investigating section above conducting investigation based on network identifier information sent from the existing base stations.

The base station apparatus of the present invention  
20 in the above configuration adopts a configuration including a scrambler that performs scrambling processing on network identifiers.

These configurations, by providing a network identifier with an offset value, make it possible to more  
25 effectively prevent collision among network identifiers, support more communication networks and increase the number of installable communication networks.

The communication terminal apparatus of the

present invention adopts a configuration including a receiver that receives a signal including information that correlates communication networks with network identifiers and a transmitter that periodically  
5 transmits the information above to the other end of communication.

This configuration can assign network identifiers efficiently even when it is not possible to receive a control channel between base stations having overlapping  
10 service areas.

The network identifier assignment method of the present invention comprises a step of investigating network identifiers of existing base stations having overlapping communication network service areas and a  
15 step of assigning an unused network identifier based on the investigation result as the network identifier of the own station.

This method makes it possible to assign a NET-ID so that the NET-ID does not collide with NET-IDs of other  
20 communication networks when multiple communication networks coexist.

The network identifier assignment method of the present invention comprises a step of investigating network identifiers of existing base stations having  
25 overlapping communication network service areas, a step of setting an extension identifier when the result of the investigation above shows that there is no unused network identifier and extending the number of bits

assigned to the network identifier and a step of assigning an unused network identifier as the network identifier of the own station.

This method makes it possible to assign a network identifier so that the network identifier does not collide with network identifiers of other communication networks even when multiple communication networks coexist. This method also makes it possible to extend the number of installable communication networks.

The network identifier assignment method of the present invention in the above method conducts investigation based on network identifier information sent from existing base stations.

The network identifier assignment method of the present invention in the above method includes a step of performing scrambling processing on network identifiers.

The base station apparatus and network identifier assignment method of the present invention described above investigate NET-IDs of adjacent base stations and assign a NET-ID of the own station based on the investigation result, and therefore can prevent NET-IDs from colliding with each other when multiple communication networks coexist.

This application is based on the Japanese Patent Application No.HEI 11-164468 filed on June 10, 1999, entire content of which is expressly incorporated by reference herein.

### Industrial Applicability

The present invention is applicable to a  
communication terminal apparatus and base station  
5 apparatus in a digital radio communication system.

20250101 10:00:00

What is claimed is:

1. A base station apparatus comprising:  
investigating means for investigating network  
identifiers of existing base stations having overlapping  
5 communication network service areas; and  
network identifier assigning means for assigning  
an unused network identifier as the network identifier  
of the own station based on said result of investigation.
2. A base station apparatus comprising:  
10 investigating means for investigating network  
identifiers of existing base stations having overlapping  
communication network service areas;  
setting means for setting an extension identifier  
when said result of investigation shows that there is  
15 no unused network identifier and extending the number  
of bits assigned to the network identifier; and  
network identifier assigning means for assigning an  
unused network identifier as the network identifier of  
the own station.
- 20 3. The base station apparatus according to claim  
1, further comprising a table that correlates  
communication networks with network identifiers.
4. The base station apparatus according to claim  
1, wherein said investigating means conducts  
25 investigation based on network identifier information  
sent from existing base stations.
5. The base station apparatus according to claim  
1, further comprising a scrambler that performs

scrambling processing on network identifiers.

6. A communication terminal apparatus that carries out a radio communication with a base station apparatus, said base station apparatus comprising:

5        investigating means for investigating network identifiers of existing base stations having overlapping communication network service areas; and

         network identifier assigning means for assigning an unused network identifier as the network identifier  
10      of the own station based on said result of investigation.

7. A communication terminal apparatus comprising:

         receiving means for receiving a signal including information that correlates communication networks with network identifiers; and

15        transmitting means for periodically transmitting said information to the other end of communication.

8. A network identifier assignment method comprising:

         a step of investigating network identifiers of  
20      existing base stations having overlapping communication network service areas; and

         a step of assigning an unused network identifier as the network identifier of the own station based on said result of investigation.

25        9. A network identifier assignment method comprising:

         a step of investigating network identifiers of existing base stations having overlapping communication

network service areas;

a step of setting an extension identifier when said  
result of investigation shows that there is no unused  
network identifier and extending the number of bits  
5 assigned to the network identifier; and

a step of assigning an unused network identifier  
as the network identifier of the own station.

10. The network identifier assignment method  
according to claim 8 that conducts investigation based  
10 on network identifier information sent from existing  
base stations.

11. The network identifier assignment method  
according to claim 8, further comprising a step of  
performing scrambling processing on network  
15 identifiers.



When a communication network is newly set up, the NET-ID assignment method investigates NET-IDs of adjacent base stations and then decides an appropriate NET-ID based on the investigation result. At this time, the decided NET-ID is updated in a NET-ID table stored in the base station.

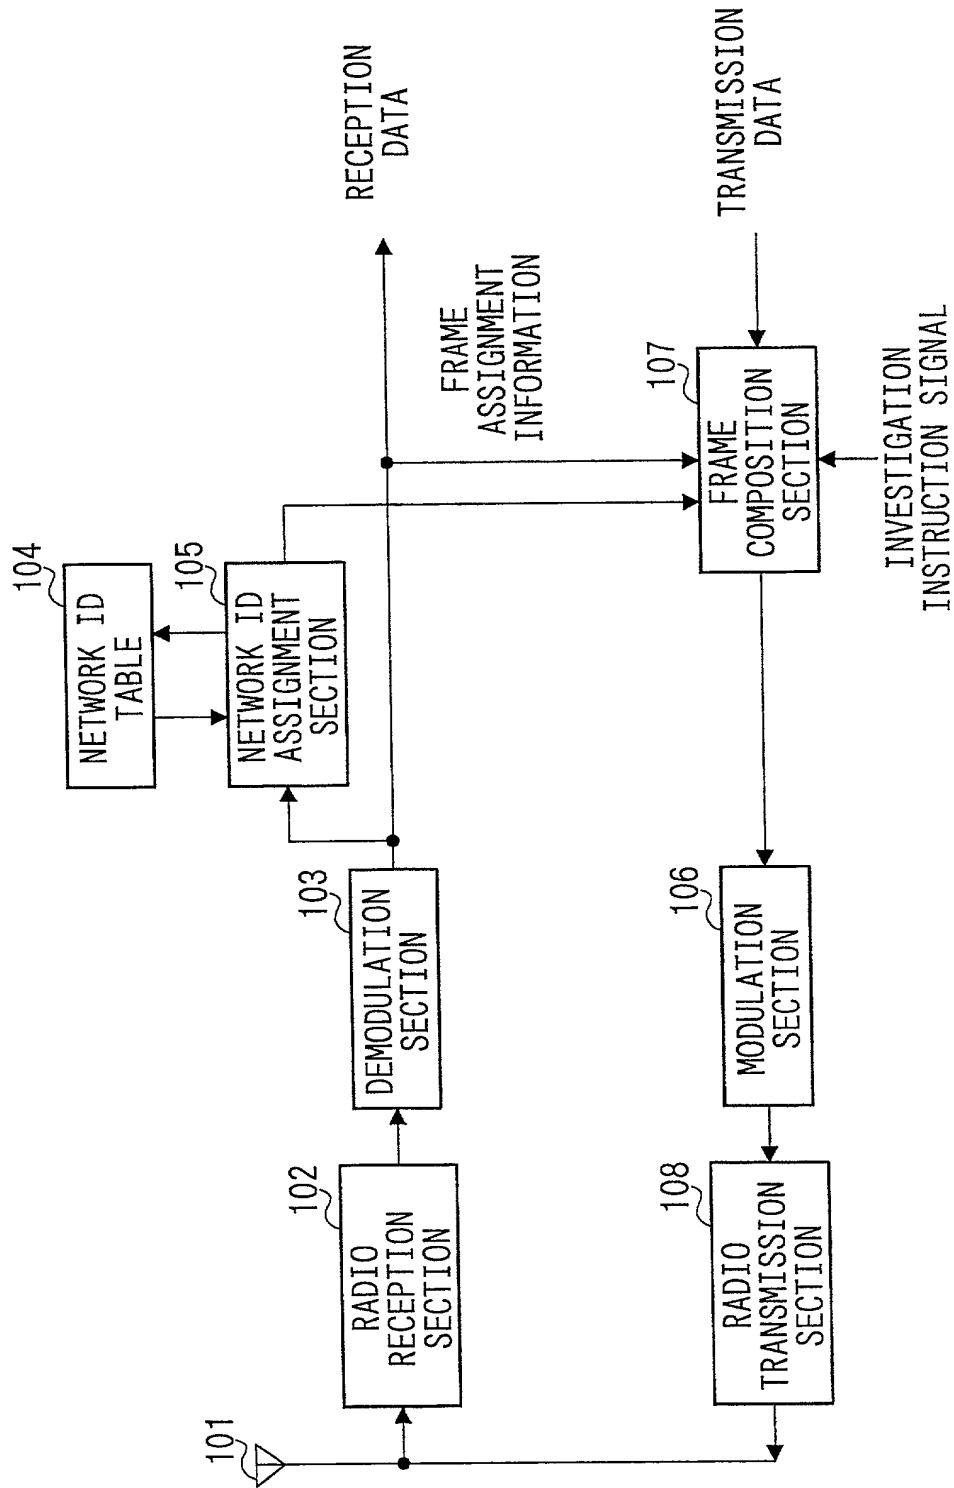


FIG. 1

2 / 8

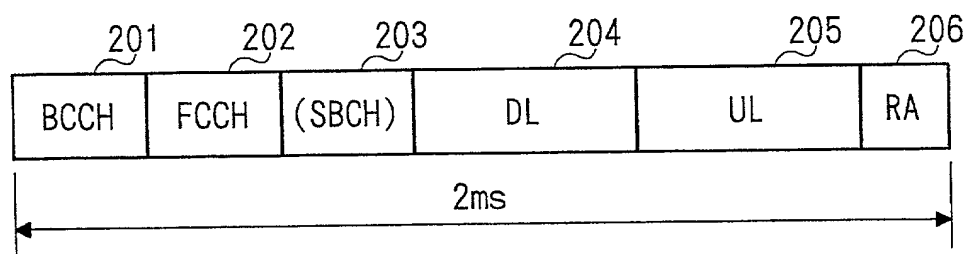


FIG. 2


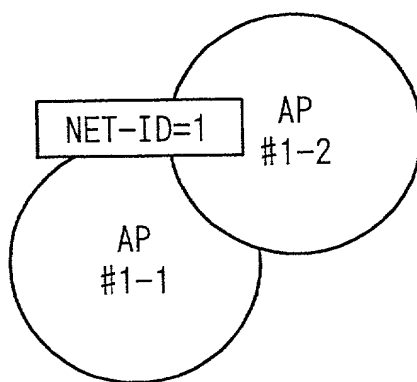


FIG. 3

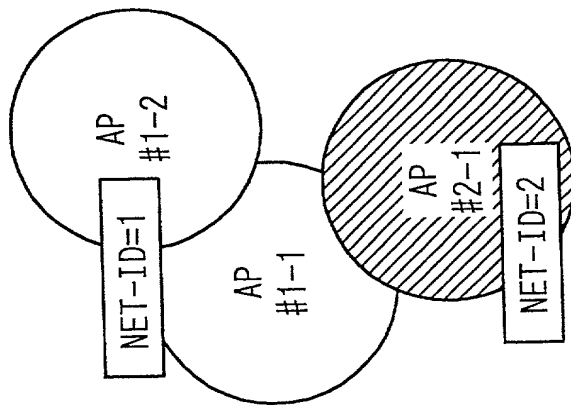

AP#1-1 NET-ID TABLE

BEFORE CHANGE		AFTER CHANGE	
NET-ID	STATUS OF USE	NET-ID	STATUS OF USE
0	UNUSED	0	UNUSED
1	USED	1	USED
2	UNUSED	2	USED
3	UNUSED	3	UNUSED

AP#2-1 NET-ID TABLE

BEFORE CHANGE		AFTER CHANGE	
NET-ID	STATUS OF USE	NET-ID	STATUS OF USE
0	UNUSED	0	UNUSED
1	UNUSED	1	USED
2	UNUSED	2	USED
3	UNUSED	3	UNUSED

FIG. 4

BEFORE CHANGE		AFTER CHANGE	
NET-ID	STATUS OF USE	NET-ID	STATUS OF USE
0	UNUSED	0	UNUSED
1	USED	1	USED
2	USED	2	USED
3	UNUSED	3	USED

BEFORE CHANGE		AFTER CHANGE	
NET-ID	STATUS OF USE	NET-ID	STATUS OF USE
0	UNUSED	0	UNUSED
1	UNUSED	1	USED
2	UNUSED	2	USED
3	UNUSED	3	USED

BEFORE CHANGE		AFTER CHANGE	
NET-ID	STATUS OF USE	NET-ID	STATUS OF USE
0	UNUSED	0	UNUSED
1	USED	1	USED
2	USED	2	USED
3	UNUSED	3	USED

FIG. 5

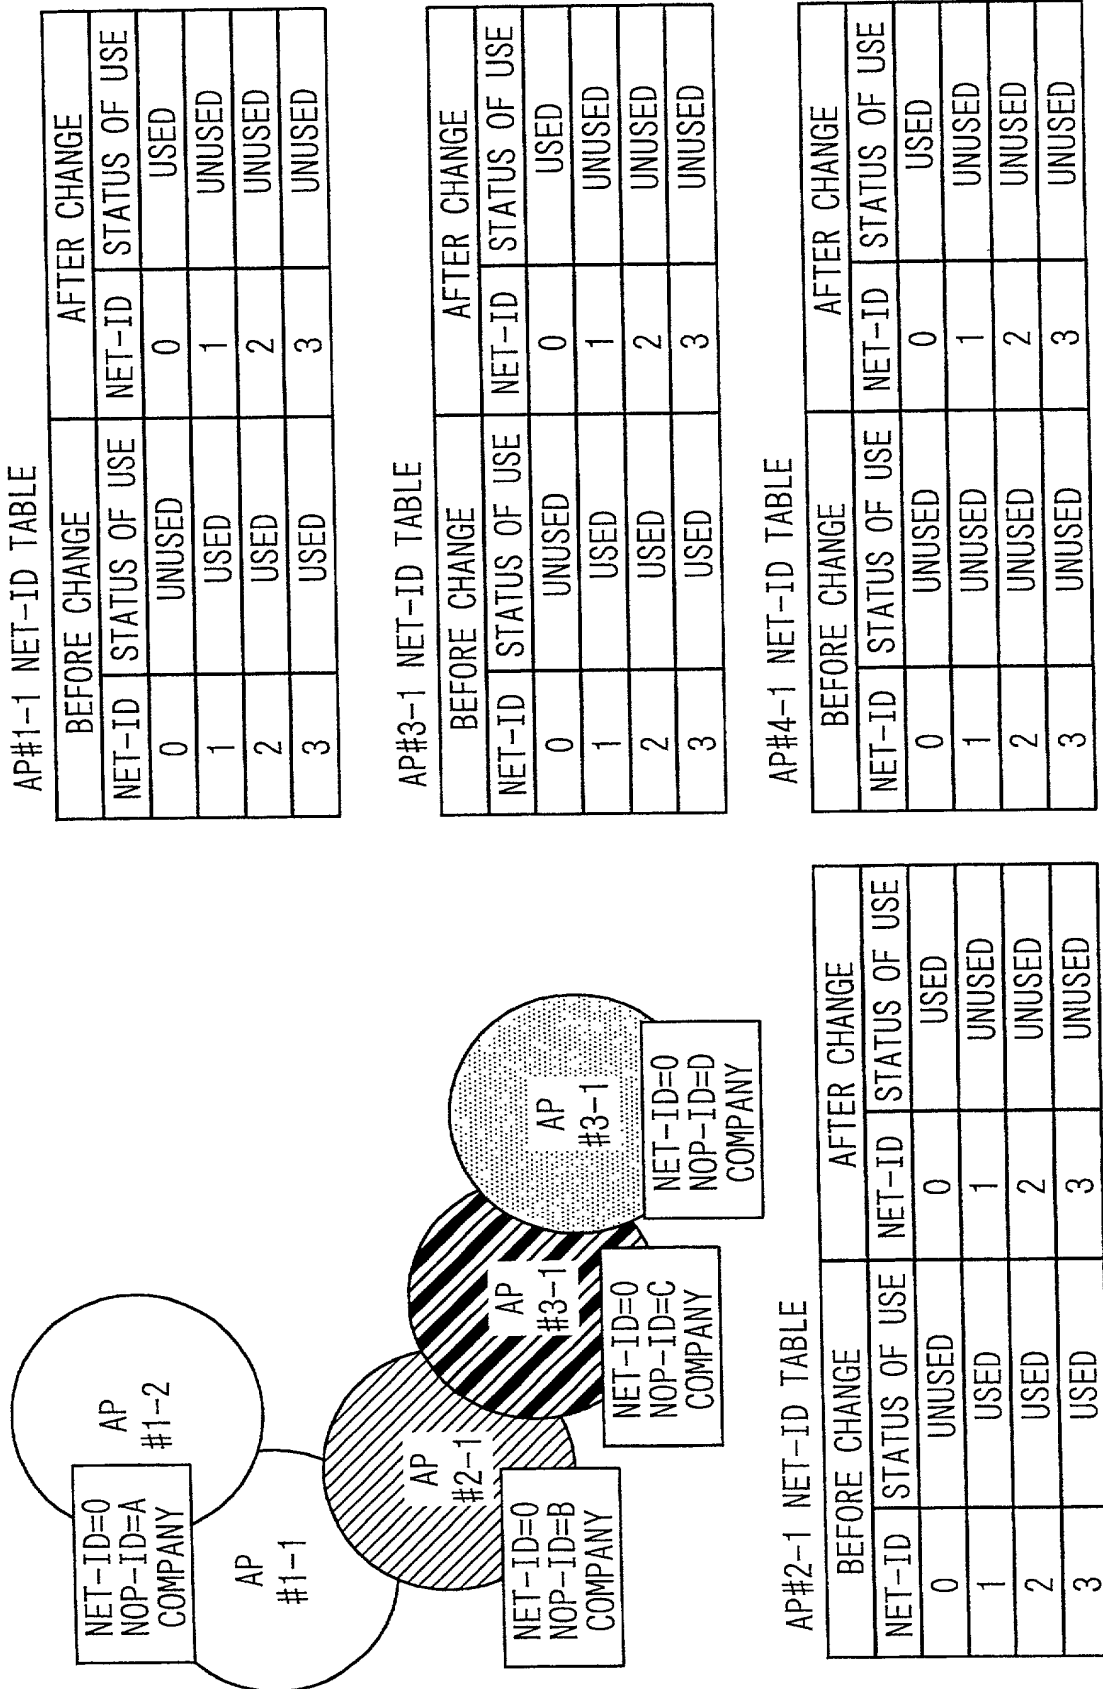


FIG. 6

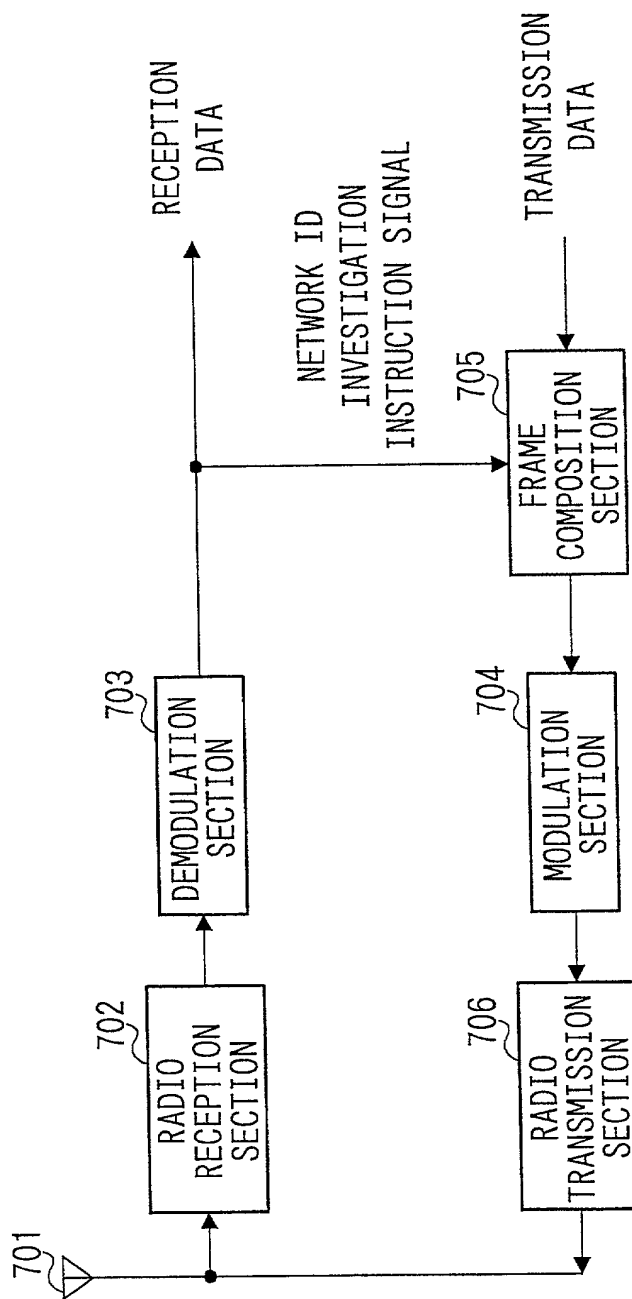


FIG. 7

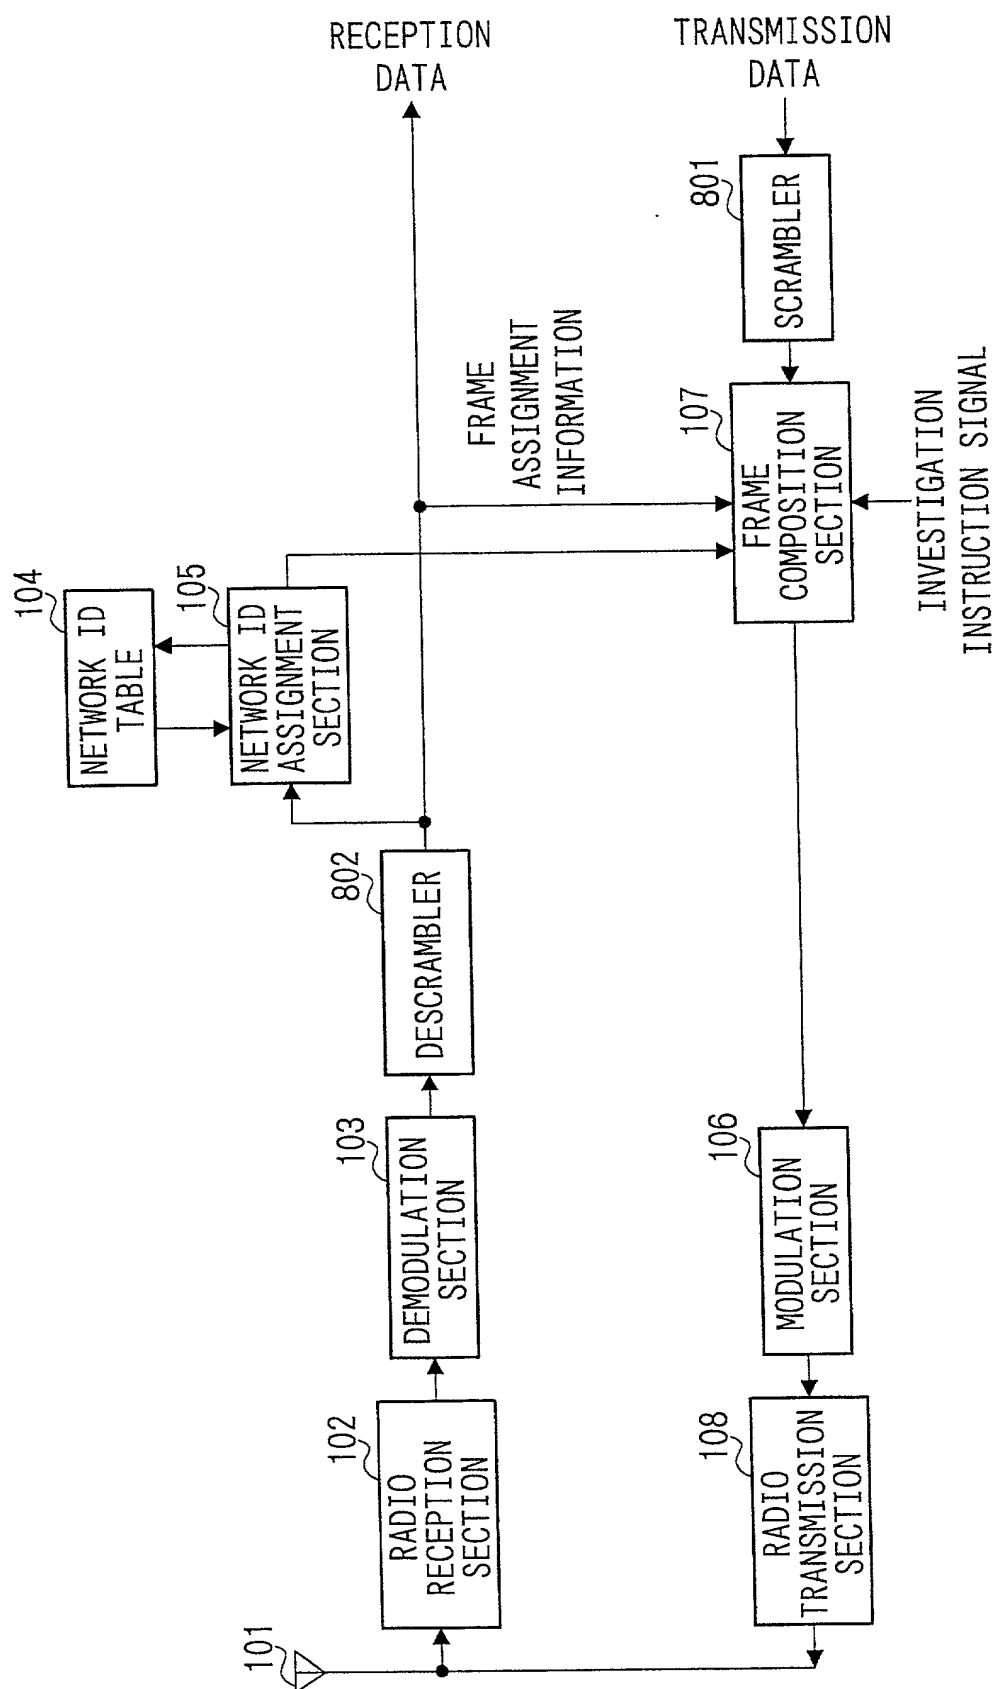


FIG. 8



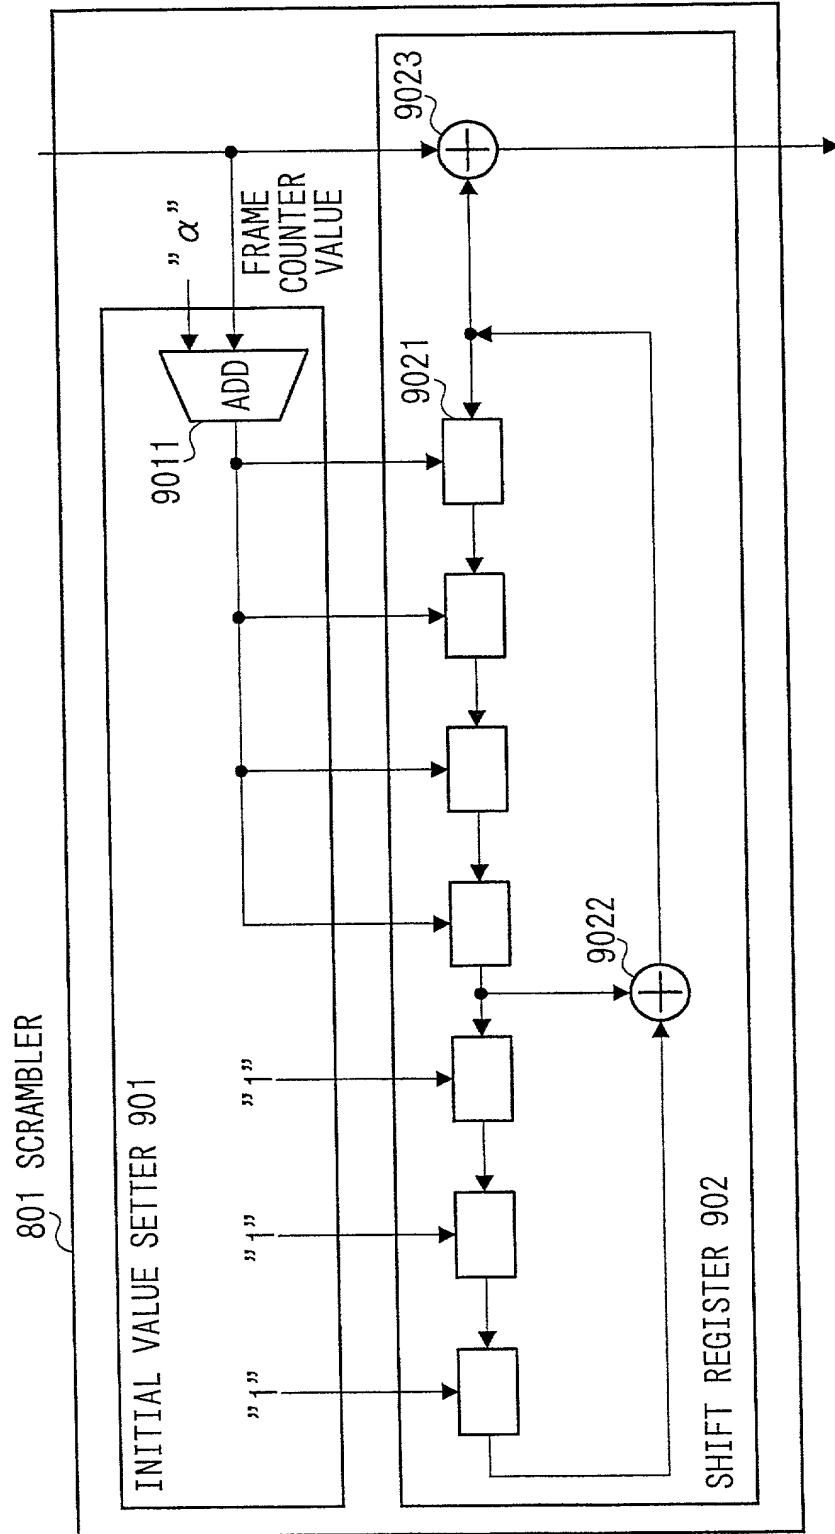


FIG. 9

**APPLICATION FOR UNITED STATES PATENT**  
**Declaration for Patent Application**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on

the invention entitled: **BASE STATION APPARATUS AND NETWORK IDENTIFIER ASSIGNMENT METHOD**

the specification of which 2 (file no \_\_\_\_\_ )

(check at least one) 3 ☐ is attached hereto  
4 ☒ was filed on **February 9, 2001** as (5) U.S. Application Serial No. \_\_\_\_\_  
6 ☐ and was amended \_\_\_\_\_  
(if applicable)

Use this portion only if you are entering the U.S. National phase based on a PCT International Application designating the U.S.	7 <input checked="" type="checkbox"/>	was filed as PCT international application
	8	Number <b>PCT/IP00/03704</b>
	9	on <b>June 8, 2000</b>
	and was amended under PCT Article(s) 19 and/or 34	
10	on _____	(if applicable).

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended, by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application (s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date earlier than that of the application(s) on which priority is claimed.

Prior (Foreign) Application(s) any Priority Claims Under 35 U.S.C. 119 Priority Claimed

11a	<b>JAPAN</b>	<b>JP11-164468</b>	<b>10/06/1999</b>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	(Country)	(Number)	(Day/Month/Year Filed)	Yes	No
	_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
	(Country)	(Number)	(Day/Month/Year Filed)	Yes	No

☐ Additional foreign application numbers are listed on a supplemental priority data sheet attached hereto.

Priority Claim(s) from U.S. Provisional Application(s) – I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

11b	_____	_____	_____	_____
	Application No.	Day/Month/Year Filed	Application No.	Day/Month/Year Filed

Do not use this portion to identify a PCT application if the parent application is the U.S. National phase of the PCT application	I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between filing date of the prior application and the national or PCT international filing date of this application.		
	13 _____	_____	_____
	(U.S. Application Number)	(U.S. Filing Date)	Status (patented, pending, abandoned)

I hereby appoint the following attorneys of the firm of Stevens, Davis, Miller & Mosher, L.L.P. as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office:

3

James E. Ledbetter, Reg. No. 28732; Thomas P. Pavelko, Reg. No. 31689; and Anthony P. Venturino, Reg. No. 31674.

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO**  
**STEVENS, DAVIS, MILLER & MOSHER, L.L.P., 1615 L Street, N.W., Suite 850, Washington, D.C. 20036,**  
**TELEPHONE (202) 408-5100, FACSIMILE (202) 408-5200.**

See page 2 for signature lines

# INSTRUCTIONS FOR COMPLETION OF THIS FORM

line 1 Insert the same title as is used on the specification and in the assignment.

line 2 Is optional but is provided so that you can use it to identify more readily an application prior to the time that the Patent Office application serial number is assigned. We suggest that the specification, drawings and declaration always bear a file number since it can help to get the papers together in case they become inadvertently separated. In instances where the specification is filed without a signed declaration form (under 37 CFR §1.53) a file number on a later-received separate form will assist us in associating it with the correct case.

line 3 Check this box if the specification, claims and drawing (if any) are attached to this declaration form, e.g., when filing a new patent application.

lines 4-5 Are only used in an instance where the application is already on file and the declaration from is being separately filed, e.g., when the application was originally filed without a signed declaration or where the Patent Office has required a new declaration because of a deficiency in the original declaration. In such an instance the Patent Office will require that lines 4 and 5 be completed with the filing date and application serial number already assigned.

line 6 Is used in conjunction with line 5 but only when there have been one or more amendments to the specification or claims. Line 6 is also used when the Examiner requires a new declaration because claims inserted by amendment cover subject matter not originally claimed (37 CFR §1.67).

lines 7-10 Are for PCT (Patent Cooperation Treaty) cases and are used only when you are entering the U.S. National phase (Chapter I or II) based upon a previously filed PCT International application designating the U.S.

line 7 Check this box if this is a PCT National Phase application.

line 8 Insert PCT International application number.

line 9 Insert date of filing of PCT International application.

lines 10 Insert the date of all amendments filed in the PCT International application. Such amendments are optional, so this line at times will not be used.

line 11a Is used in the following instances:

- (i) If a single priority is being claimed from a foreign application you need to list only the first-filed application; you do not need to list other countries if all applications were filed within one year of the U.S. filing.
- (ii) If multiple priorities are being claimed, from a plurality of applications filed in one or more countries, you must list the first filed application for each aspect of the invention. Example: if aspect A of the invention was disclosed in an application filed 11 months earlier in country X and aspect B was disclosed 9 months earlier in an application filed in country Y, then the applications in both countries X and Y must be identified. Only the first application for each aspect of the invention needs to be identified provided all applications on that aspect were filed within one year prior to the U.S. filing.
- (iii) If a non-priority application is being filed you must list all applications in all countries where corresponding foreign applications were filed more than one year prior to the U.S. filing. This is so the Examiner can check to see if any of those applications were published or patented early enough to be prior art against the U.S. application.
- (iv) If there are more than two applications to be listed we suggest that you type in on this form only "See attached Schedule A" and then list all of the previous applications on an attached sheet.

line 11b Is used to claim priority under 35 USC §119(e) based on a provisional application filed within one year of the filing of the instant application. More than ~~one~~ provisional application may be identified provided neither was filed more than one year earlier.

line 12 This block is used only in instances where there is a previously filed U.S. non-provisional application which was copending at the time the present application was (or is being) filed. That previous application could be a U.S. non-provisional application or the National Phase of a PCT allocation. In such a case the present application may be entitled to the priority of the previous application's U.S. filing date (and consequently the foreign priority thereof) provided the present application is identified as a continuing application (continuation, divisional or continuation-in-part) of the earlier (parent) application. If the foregoing is applicable, please fill in one line for each such prior application.

line 13 Type the inventor's proper legal name in the order specified, e.g., "John B. JONES" or "J. Bob JONES" if the inventor so prefers. It is not acceptable to use only initials such as "J. B. JONES."

line 14 The inventor's "signature" may be his (or her) usual manner of signing but it is preferable that the inventor simply write his (or her) name in his (or her) own cursive handwriting in the same order as on line 14, e.g., given name, middle initial and Family name.

line 15 Insert the actual date of signature.

line 16 Insert simply the city and state or country, e.g., "Paris, France", of the inventor's residence, not citizenship. No street address or postal code is required on this line.

line 17 Insert the inventor's citizenship. The statement of citizenship (or subject of) is a statutory requirement (35 USC §115). Simply the name of the country of citizenship, e.g., "Japan" is sufficient.

line 18 Insert the inventor's mailing address. The purpose of requiring the post office address is to enable the Patent Office to communicate directly with the inventor if desired, such as in the case of death of the U.S. attorney. It should be the address where the inventor customarily receives his (or her) mail and should include the postal code. If applicable it can be the inventor's business address or address at place of employment.

Applicants are reminded that the U.S. Patent and Trademark Office has very strict requirements as to proper execution of an application. The applicant should make sure that he reviews the declaration, prior to signing to make sure the declaration properly identifies the application and all relevant information; and should review the specification and claims (including drawings, if any) before signing the declaration. Failure to do so will require the filing of a supplemental declaration --- 37 CFR §1.67(c).

Any handwritten changes to the specification, claims or drawings must be in ink personally by all of the inventors prior to signing the declaration and the adjacent left margin must be initialed and dated by all of the inventors, e.g., "JB 6-9-91".

Please let us know if there are any questions regarding proper completion of this form. Thank you.

An assignment, a separate document requiring separate signature and dating may be enclosed. Please look for it and sign and date it in the same manner as in lines 15 and 16 above.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

PAGE 2 OF U.S.A. DECLARATION FORM

13a	Typewritten Full Name of Sole or First Inventor	<u>Takashi</u>	<u></u>	<u>ARAMAKI</u>
		Given Name	Middle Name	Family Name
14a	Inventor's Signature	<u>Takashi Aramaki</u>		
15a	Date of Signature	<u>March</u>	<u>16</u>	<u>2001</u>
		Month	Day	Year
16a	Residence	<u>Yokohama-shi</u>	<u>Kanagawa</u>	<u>JAPAN JPX</u>
		City	State or Province	Country
17a	Citizenship	<u>JAPAN</u>		
18a	Post Office Address (Insert complete mailing address, including country)	<u>1-35-10-201, Ooka, Minami-ku,</u> <u>Yokohama-shi, Kanagawa 232-0061 JAPAN</u>		
13b	Typewritten Full Name of Sole or Second Inventor	<u>Yoshimasa</u>	<u></u>	<u>SHIRASAKI</u>
		Given Name	Middle Name	Family Name
14b	Inventor's Signature	<u>Yoshimasa Shirasaki</u>		
15b	Date of Signature	<u>March</u>	<u>16</u>	<u>2001</u>
		Month	Day	Year
16b	Residence	<u>Fujisawa-shi</u>	<u>Kanagawa</u>	<u>JAPAN JPX</u>
		City	State or Province	Country
17b	Citizenship	<u>JAPAN</u>		
18b	Post Office Address (Insert complete mailing address, including country)	<u>5-3-23-305, Shonandai,</u> <u>Fujisawa-shi, Kanagawa 252-0804 JAPAN</u>		
13c	Typewritten Full Name of Sole or Third Inventor	<u></u>	<u></u>	<u></u>
		Given Name	Middle Name	Family Name
14c	Inventor's Signature	<u></u>		
15c	Date of Signature	<u></u>	<u></u>	<u></u>
		Month	Day	Year
16c	Residence	<u></u>	<u></u>	<u></u>
		City	State or Province	Country
17c	Citizenship	<u></u>		
18c	Post Office Address (Insert complete mailing address, including country)	<u></u>		
13d	Typewritten Full Name of Sole or Fourth Inventor	<u></u>	<u></u>	<u></u>
		Given Name	Middle Name	Family Name
14d	Inventor's Signature	<u></u>		
15d	Date of Signature	<u></u>	<u></u>	<u></u>
		Month	Day	Year
16d	Residence	<u></u>	<u></u>	<u></u>
		City	State or Province	Country
17d	Citizenship	<u></u>		
18d	Post Office Address (Insert complete mailing address, including country)	<u></u>		

\*Note to Inventor: Please sign name on line 15 exactly as it appears in line 14 and insert the actual date of signing on line 16. If there are more than four inventors, please add a copy of this page for identification and signatures for the additional inventors.